

### 6148 Series Zero Clients

Model Numbers: 6148v, 6148c, 6148m

### Industry Leading Endpoints & Management Software

The 10ZiG 6148 Series is a performance beast! Stylish, compact, and fanless, this power-user based endpoint kicks things into gear for your high-demand workers with DDR4 RAM (2 x SO-DIMM Slots), 8 USB ports, and 4-monitor support at 4K @ 60Hz display resolution. Supportive of VMware, Citrix, Microsoft, Amazon WorkSpaces, and more. Equipped with free centralized management via The 10ZiG Manager™, which comes cloud-enabled with unlimited user licenses. Covered by a 3-Year Advance Warranty, technical support, and software upgrades. Also available in a Thin Client device.




- ▶ AMD Dual Core 2.3GHz (3.2GHz Burst)
- ▶ 4 x DisplayPort (3840 x 2160), 4K @ 60Hz
- ▶ Up to 32GB DDR4 RAM for High Speed Support
- ▶ 5 x USB Port 2.0, 2 x USB Port 3.0, 1 x USB Port Type C
- ▶ RJ45 LAN/Fiber LAN (SFP) Ready Options
- ▶ TAA Compliant
- ▶ Optional Wireless (Dual External Antenna)
- ▶ Supports VESA Mount and Kensington Lock
- ▶ FREE Centralized Management via 10ZiG Manager™

# 6148 Series Zero Clients



| System             |  |
|--------------------|--|
| Management         | 10ZiG Manager™   |
| Processor          | AMD Dual Core 2.3GHz (3.2GHz Burst)  |
| Processor Graphics | Radeon Vega 3  |
| Dimensions         |  |
| Device             | 8.27" (D) x 2.09" (W) x 9.06" (H) in.  |
| Weight             | 5.64 lbs. (2.56 kg.)   |
| Connections        |  |
| Ports on Device    | 4 x DisplayPort, 5 x USB Port 2.0, 2 x USB Port 3.0, 1 x USB Port Type C, 1 x Smart Card Reader, 1 x Mic-In, 1 x Line-Out, 1 x DC Jack |
| Video Resolution   | 4 x (3840 x 2160) @ 60Hz (4 Monitors at 4K UHD)  |
| Networking         |  |
| Wireless           | Optional (802.11 a/b/g/n/ac External Antenna)  |
| Ethernet           | 10/100/1000 Base-T, RJ45 LAN or Fiber LAN (SFP) Optional   |
| Environmental      |  |
| Operating Temp.    | 32° - 95°F (0° - 35°C), 20-80% non-condensing humidity   |

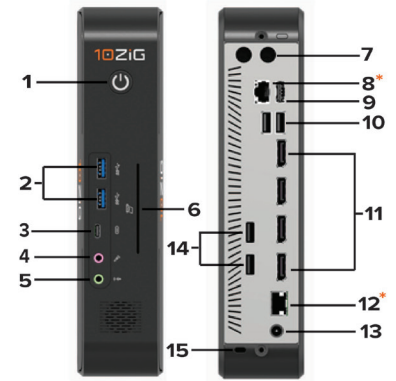

### SPECIFICATIONS

- 1. Power Button
- 2. USB 3.0
- 3. USB C
- 4. Mic-In
- 5. Line-Out
- 6. Smart Card Reader (Optional)
- 7. Antenna Holes
- 8. RJ45 LAN
- 9. USB 2.0
- 10. USB 2.0
- 11. DisplayPorts
- 12. Fiber LAN(Optional)
- 13. DC Jack
- 14. USB 2.0
- 15. Kensington Lock Slot

|                     | <u>VMware</u><br><b>6148v</b>   | <u>Citrix</u><br><b>6148c</b>             | <u>Microsoft</u><br><b>6148m</b>                          |
|---------------------|---|---|---|
| Operating System    | NOS™ (Zero)   | NOS™ (Zero)                               | NOS™ (Zero)   |
| Memory (RAM)        | Std: 8GB<br>Max: 32GB   | Std: 8GB<br>Max: 32GB                     | Std: 8GB<br>Max: 32GB                                     |
| Supported Protocols | Blast Extreme, PCoIP, RDP   | Citrix ICA and EDT (HDX)                  | Azure Virtual Desktop, RDP                                |
| Connection Server   | Horizon, Workspace One,<br>Horizon Security Server,<br>Unified Access Gateway | Storefront,<br>Netscaler,<br>Citrix Cloud | Direct RDP,<br>RD Gateway,<br>RD Load Balancer,<br>RD Web |

Note: Actual display performance, such as multi-monitor and higher resolutions including 4K/UHD/QHD/WQHD are dependent upon your current VDI infrastructure and any additional requirements. Consult with 10ZiG for further guidance and model recommendation.



Americas P: +1 (866) 865-5250 E: info@10ZiG.com  
 EMEA P: +44 (0) 116 214 8650 E: info@10ZiG.eu  
 APAC P: +61 2 80027421 E: info@10ZiG.com.au  
 DE P: +49 (0) 6724 9304-45 E: vertrieb@10zig.de

W: www.10ZiG.com

